

A high-energy photograph of Mick Thomson, lead guitarist of the band Amonia, performing on stage. He is wearing a black leather jacket and has long, dark, messy hair that is flying around his head. He is playing a black Fishman electric guitar with a white pickguard. The background is dark with vibrant blue and purple stage lights creating a bokeh effect. The overall mood is intense and dynamic.

FISHMAN®

FLUENCE SIGNATURE SERIES MICK THOMSON
INSTALLATION GUIDE

ELLIE MITCHELL PHOTOGRAPHY

System Requirements

These instructions provide installation options for the Fishman Fluence series of multi-voice pickups, but these instructions are not comprehensive. A skilled electronics technician can simply interpret this overview to create a wide range of custom wiring options. Please consult with your installer for alternate switching and control components or options not specifically detailed in this guide or included with your pickup purchase. Please visit www.fishman.com for additional wiring diagrams.

Installation Warning!

By self-installing and/or misusing this product, you understand and agree that and such uses are high risk activities and, to the extent permitted by law, YOU EXPRESSLY AND VOLUNTARILY ASSUME THE RISK OF DEATH OR OTHER PERSONAL INJURY SUSTAINED WHILE PARTICIPATING IN SUCH ACTIVITIES WHETHER OR NOT CAUSED BY THE NEGLIGENCE OR ANY OTHER FAULT of Fishman, including but not limited to equipment malfunction from whatever cause, or any other fault of Fishman. Additionally, you agree to indemnify, defend and hold Fishman harmless from any third party claims arising from such activities.

Getting Started

1. Determine the rotary controls (Volume, Tone, etc.) and switches to be used in your installation, including those included with your purchase. Test fit the components to make sure that each will fit in the allocated locations or modify the instrument until the fit is correct and all controls can be located without issue. Fishman Fluence Pickups are low impedance and perform ideally with 25K audio taper potentiometers.

2. Fishman Fluence multi-voice pickups require a 9V power supply.

- If using a standard 9V battery, test fit cavity locations for simple installations or consider installing an externally accessible battery compartment (available separately). Note that it is important the battery is not allowed to short contacts between controls in the instrument.
- If using a separately purchased Fishman rechargeable battery, refer to those instructions to complete this part of your installation.
- Note that it may be possible to combine other active pickups with Fishman Fluence pickups, but all pickups will need to use the same 9V power source. Only low impedance pickup combinations are supported.

3. One or more of your Fluence pickups will have a preamp built into the base of the pickup assembly. Preamplified pickups each have their own switching capabilities. In setups controlled by a single preamp, such as the Fluence Single-Width set, optional switching on the preamplified pickup will alter the output of all pickups connected to that preamplifier. The preamps on Fishman Fluence pickups are not suitable for use with other brands of guitar pickups.

4. All Pickup Voicing, High Frequency Tilt (HF Tilt) and Gain reduction features are selected by connecting their leads to Ground. These features and their wire locations are described in the user guide accompanying each pickup. During installation, any of these selections can be made switchable (using the included push-pull pot or other preferred switch) or permanent by either connecting to Ground or leaving "open" (unconnected). Some switching scenarios are provided below, featuring the components provided with your purchase, but any schematic allowing connection to Ground can be used.

5. Review your planned scheme for errors, complete the soldering, mount and secure all your components, and test your completed installation before assembly. Consider a popular wiring option as shown on the reverse side of this guide.



Fluence Mick Thomson - Connection Points & Functions

1. Voice-2 Select Wire - Voice-1 is the default voice with no voice pins grounded/selected.

To select Voice-2, connect this pin to ground through a switch contact or permanently by soldering it to any ground or by using one of the included jumpers across the pins.

This pin is an electronically controlled switch and has no signal on it. It can share a switch contact with other voice select wires without interaction.

Note: the Single Coil / Voice-3 select pins (2&3) override Voice-2 select. Therefore, the Voice-3 pins must be disconnected (not grounded) to allow Voice-2 selection.

2. Voice-3 Outer Single Coil Select Wire - To select Voice-3 with Outer Coils active, connect this pin to ground through a switch contact.

This pin engages Voice-3 with the outer coils active (Bridge-side / North Coil for Bridge and Neck-side / South Coil for Neck). Both pickups used together in this mode will provide hum cancellation.

When selected, either Single Coil / Voice-3 mode overrides the status of Voice-1 or 2.

3. Voice-3 Inner Single Coil Select Wire - To select Voice-3 with Inner Coils active, connect this pin to ground through a switch contact.

This pin engages Voice-3 with the inner coils active (Neck-side / South Coil for Bridge and Bridge-side / North Coil for Neck). Both pickups used together in this mode will provide hum cancellation.

4. Voice-1 Bass Boost (Bridge Pickup Only) - Voice-1 is fine tuned for tight chugging tone. This option provides a subtle bass boost for extra punch and fullness. It can be useful to optimize and fine tune the response of various guitar/amp combinations. This pin is an electronically controlled switch and can share a switch contact with similar control wires without interaction.

5. SCO (South Coil Out) - This solder pad is used to conveniently access the south coil output on each pickup for HSH (Humbucker, Single, Humbucker) and HSS pickup combinations using the Fluence SSA Single width pickup.

The south coil is on the neck side of each pickup. The SSA pickup is a north coil, allowing hum cancelling combinations in the 2&4 positions on a 5-way pickup switch.

6. +9-18V - This is the + dc power input pin. Fluence pickups are designed to have a wide dynamic range running from a 9V supply, however they are 18V compatible for instruments already set up that way.

7. Output - The main output pin has a 2k ohm output impedance and is suitable for driving low impedance volume and tone pots, typically 25k.

8. HFT (High Frequency Tilt) - This feature provides a subtle high frequency rolloff at 10kHz to smooth out the top end of guitar/amp combinations that have a bit more "fizz" than desired.

To activate, connect the HFT contact pad to ground either wired through a switch or permanently by creating a solder bridge to the GND pad next to it.


The HFT pad has signal on it. To prevent unwanted interaction, it should not share a switch contact with any other HFT or voice select wire.

FISHMAN FLUENCE[®] **Mick Thomson Humbucker Set**

Volume - Pull for Bridge Pickup Voice-1 Bass Boost

Tone - Pull for Voice-2 (1,3,& 5 positions)

Oak Grigsby 5-way Superswitch

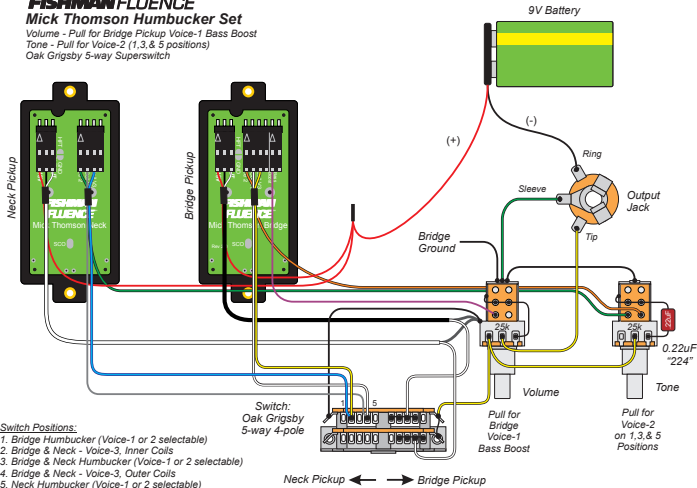

Switch Positions:

1. Bridge Humbucker (Voice-1 or 2 selectable)
2. Bridge & Neck - Voice-3, Inner Coils
3. Bridge & Neck Humbucker (Voice-1 or 2 selectable)
4. Bridge & Neck - Voice-3, Outer Coils
5. Neck Humbucker (Voice-1 or 2 selectable)


FISHMAN FLUENCE™

Mick Thomson Humbucker Set

Volume - Pull for Bridge Pickup Voice-1 Bass Boost

Tone - Pull for Voice-3 Outer Coils (Inner Coils Default)

Mini Toggle for Voice Select

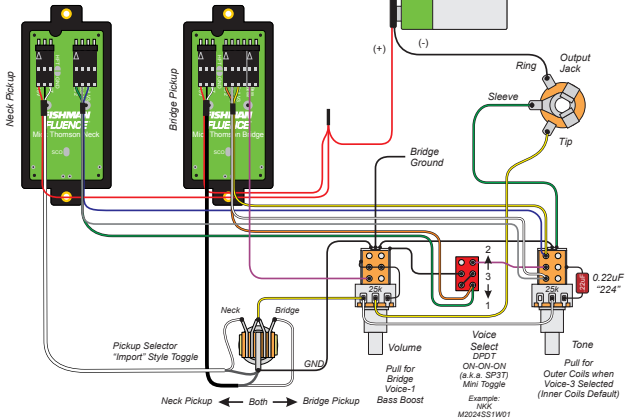


FISHMAN FLUENCE™

Mick Thomson Humbucker Set

Volume - Pull for Bridge Pickup Voice-1 Bass Boost

Mini Toggle for Voice Select

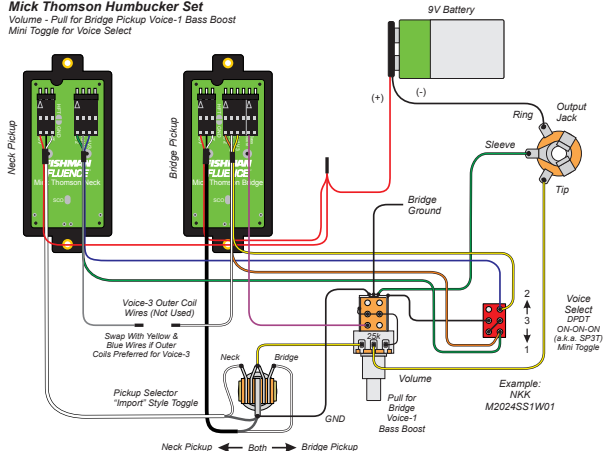


FISHMAN FLUENCE™

Mick Thomson Humbucker Set

Volume - Pull for Voice-3 Outer Coils (Inner Coils Default)

Mini Toggle for Voice Select

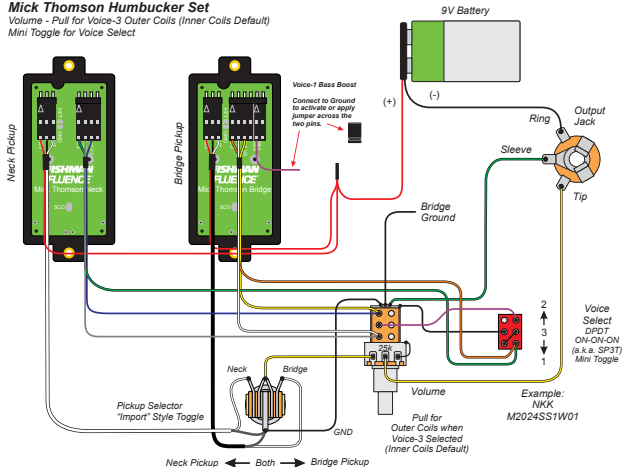


FISHMAN FLUENCE™

Mick Thomson Humbucker Set

Bridge Volume - Pull for Bridge Voice-1 Bass Boost

Neck Volume - Pull for Voice-3 Inner Coils

Tone - Pull for Voice-2

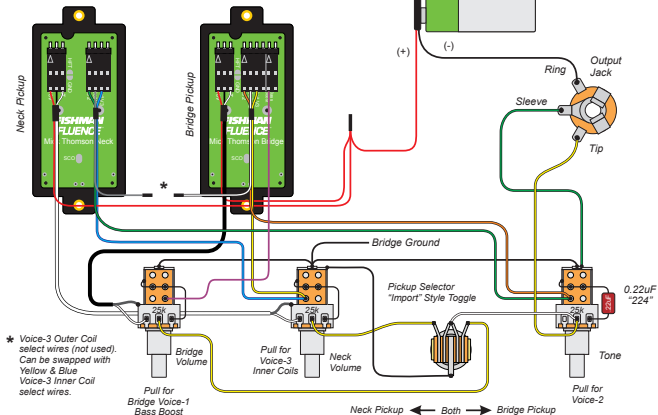


FISHMAN FLUENCE[®]


Mick Thomson Humbucker Set

Bridge Volume - Pull for Bridge Voice-1 Bass Boost

Neck Volume - Pull for Voice-3 Inner Coils

Tone - Pull for Voice-2

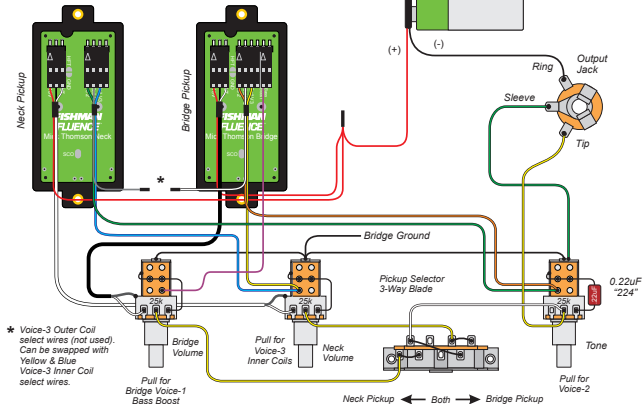



PRODUCT PAGE & INSTALL GUIDE

FISHMAN[®]



Paper Collection
Papiersammlung
Collezione di carta
Collection de papier
Colección de papel