FISHMAN FLUENCE^{TT} Tosin Abasi Signature 6, 7, & 8 String Pickup Set - Rev2

Fishman Recommended Wiring Diagram

1xVolume, 1xTone (pull for humbucker Voice-2)

Notes:

Switch Positions:

4. Neck Outer Coil (Voice-3)

1. Voice-3 (single coil mode) over rides the Voice-1/Voice-2 selection.


2. For Rev2, the NCO & SCO (North Coil Out & South Coil Out) contacts are accessed from the 4-pin connectors. (vs. Solder Pads on Rev1) The grey wire is the Neck NCO and the white wire is the Bridge SCO.

3. Pickup selector switch shown is Oak Grigsby Super Switch (4-pole 5-way).

1. Bridge Humbucker (Voice-1 or 2 selectable)

2. Bridge & Neck Inner Coils (Bridge Voice-3)

5. Neck Humbucker (Voice-1 or 2 selectable)

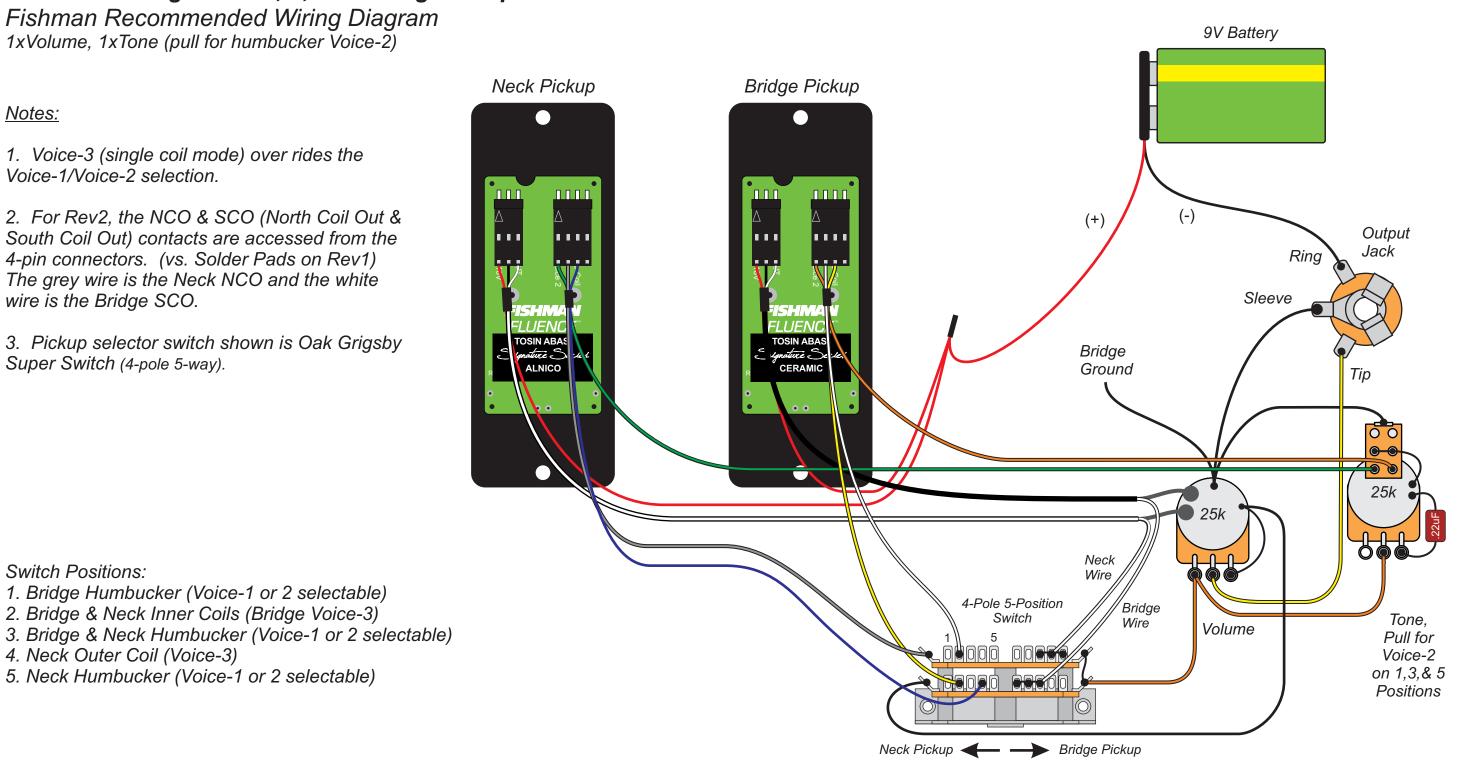

CAUTION! Excessive pressure may puncture the battery. Isolate all components during installation to eliminate shorting or risk of fire.