## **FISHMAN** FLUENCE<sup>™</sup> Tosin Abasi Signature 6, 7, & 8 String Pickup Set - Rev2 Tosin Abasi Preffered Wiring Diagram

Notes:

Switch Positions:

4. Neck Outer Coil (Voice-3)

1. Voice-3 (single coil mode) over rides the Voice-1/Voice-2 selection.

2. For Rev2, the NCO & SCO (North Coil Out & South Coil Out) contacts are accessed from the 4-pin connectors. (vs. Solder Pads on Rev1) The grey wire is the Neck NCO and the white wire is the Bridge SCO.


3. Pickup selector switch shown is Otax model 3PS1VLX91 (4-pole, 5-way).

1. Bridge Humbucker (Voice-1 or 2 selectable)

2. Bridge & Neck Inner Coils (Bridge Voice-3)

5. Neck Humbucker (Voice-1 or 2 selectable)

3. Bridge & Neck Humbucker (Voice-1 or 2 selectable)

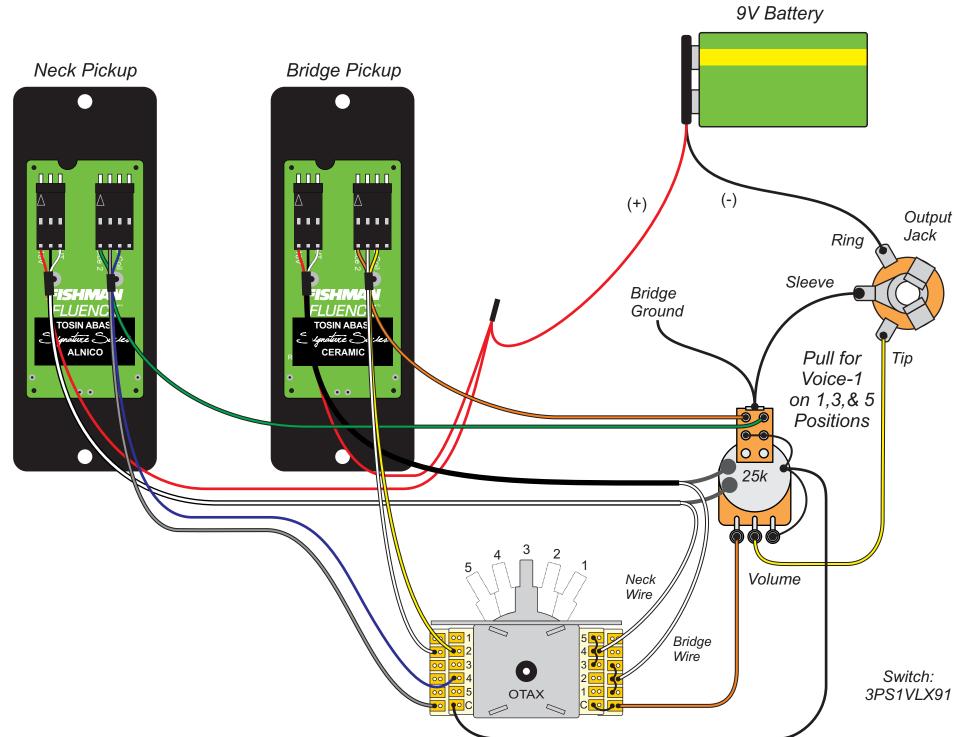

**CAUTION!** Excessive pressure may puncture the battery. Isolate all components during installation to eliminate shorting or risk of fire.